



WINNTEC

# Standard

TC800 - Standard swing arm tyre changer



41"



10" - 19"



12" - 22"



8 - 10 bar


## Model: TC800

**Product:** Standard semi automatic swing arm tyre changer

**Description:** This is a semi automatic tyre changer designed and constructed to be used for mounting and dismounting tyres on the wheel rims of motor vehicles

Features:	Benefits:
Swing Arm tyre changer	Easy to unscrew it to accommodate smaller wheels or screw it in further for the larger wheel
Semi automatic	As the arm swings to the side, the machine needs a small space to operate.
Compact unit can be mounted close to a wall	Saving on space
Plastic protection kit supplied as standard (jaw clamping, fitting head insert and bead breaker bade)	To protect rims from damage.
2500kg of bead breaker pressure	Less effort and time saving.
Heavy duty bead breaker blade	Less stress on the rest of the machine as it breaks the bead.
Integrated filter regulator lubricator	Used to regulate air pressure and separate the water and oil in the outgoing air. This also keeps your machine well lubricated and while supplying quality air.
Foot pedal operation	Less manual labor and easier to operated saving time.
Full length rubber pad for breaking the bead of the tyre	Which will save costly rim damage.
Integrated tyre inflater	No need to take tyre off the tyre changer to have it inflated saving you time.
Full jaw inflation	Enables the tyre to be inflated and bead sealed whilst being clamped on the turntable of the tyre changer
Heavy duty jaw clamp cylinders	For a powerful clamp and consistent pressure.
Training available	Technicians can be professionally trained to use the tyre changer and get the maximum benefit from it.
1 year warranty	The machine will be repaired if there are any factory faults.
Spares available	Should you have a breakdown you will not have to wait for your machine to be repaired. If there is anything we don't have, we fly it in directly from the Suppliers.
Operational videos	Technicians can learn how to operate the machine by watching a video, which is easier and more simple than written instructions.

Technical information	
Outside clamping	10" - 19"
Inside clamping	12" - 22"
Max wheel width	14"
Max wheel diameter	41"
Air supply	8 - 10 bar
Motor power	1.1Kw
Noise level	<70dB
Power supply	220V/50HZ/1PH

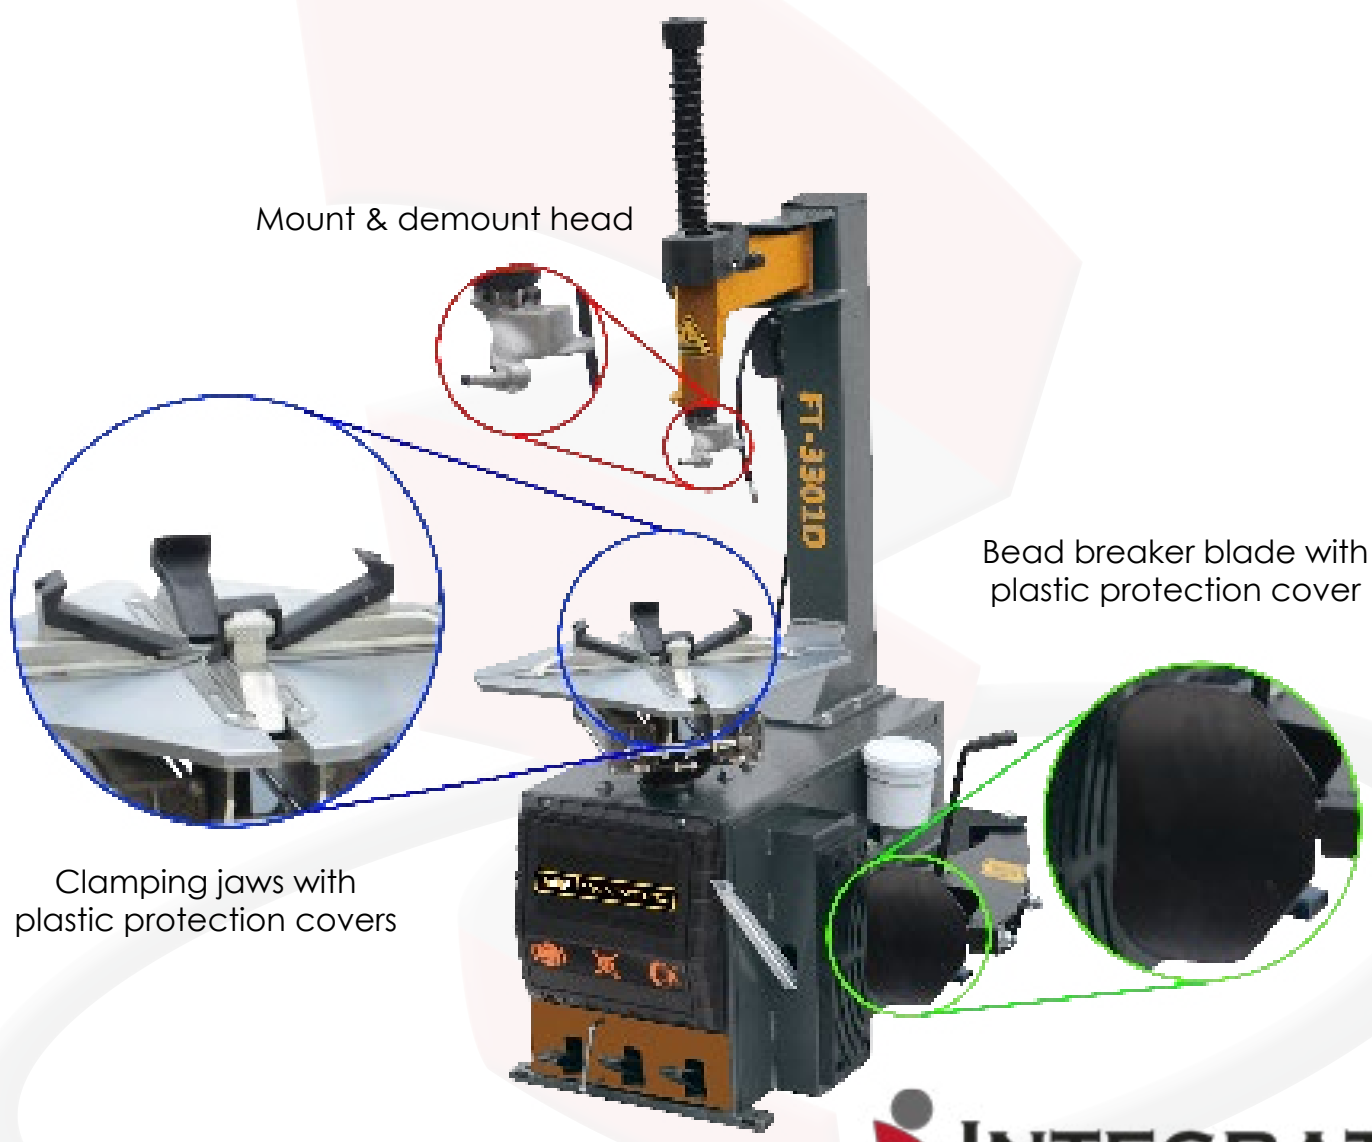

Mount & demount head

Bead breaker blade with plastic protection cover

Clamping jaws with plastic protection covers



Unit 10, Keymax Ind Park 012 664 3556  
 1006 Ergon street sales@integratedmarketing.co.za  
 Lyttelton Manor info@integratedmarketing.co.za  
 Centurion www.integratedmarketing.co.za

Colors and designs may differ

Latitude: -25.840061 | Longitude: 28.217831